



Features:

- True Power OFF Delay
- LED Status Indicator: Power ON
- DIN Rail / Back Panel Mount
- Finger Safe Terminals

Size: DIN 22.5mm

Certifications:

Technical Specifications

Input Specifications

Accuracy	Setting: $\pm 5\%$ of F.S. Repeat: $\pm 0.5\%$ or 50 msec (F.S. = Full Scale)
Reset	On resumption of power; Reset time < 100 msec

Output Specifications

Output Contact	DPDT (2 C/O)
Contact Rating	2.5A @ 230V AC / 28V DC, resistive

Functional Specifications

Modes	True Power OFF Delay
Time Ranges	0 - 60 sec, 0 - 180 sec


Supply Voltage

Supply Voltage	110 to 240V AC/DC (50 / 60Hz) -15% to 10% tolerance
Power Consumption	2.5VA max


Environmental Specifications

Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F)
Humidity (non-condensing)	95% RH
Weight	110 gms (0.242 lbs)
Protection Level	IP50 for faceplate IP40 for housing IP20 for terminals


Dimensions

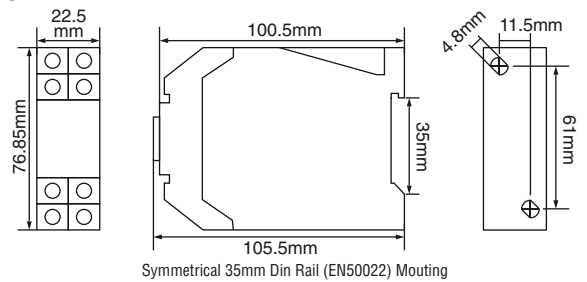

Terminal Connections

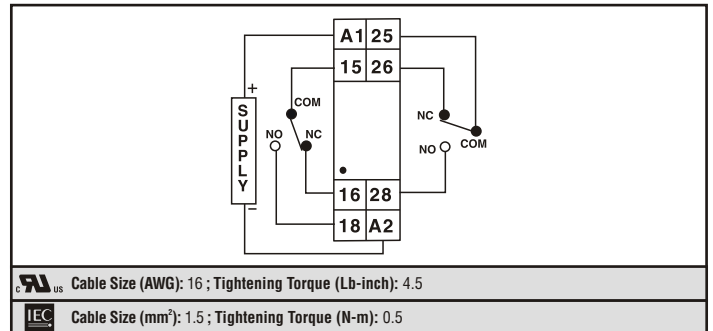

Timing Diagram

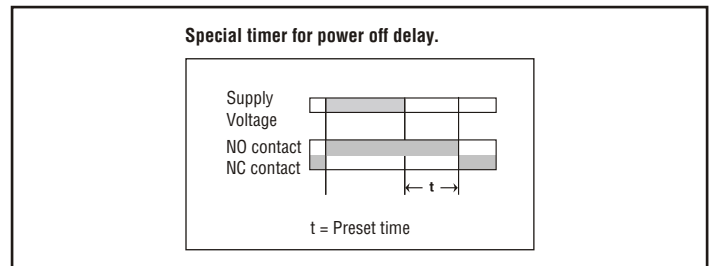

Ordering Information

This product is available in certified (UL and CE) as well as in non-certified (without UL/CE marking) types. Please order as per the requirement.

Part No.	Supply Voltage	Certification
800POD-60	110 to 240 V AC/DC	
800POD-60-CU	110 to 240 V AC/DC	
800POD-180	110 to 240 V AC/DC	
800POD-180-CU	110 to 240 V AC/DC	